


## Optimized for minimum 50mm depth of the Single Face box signs

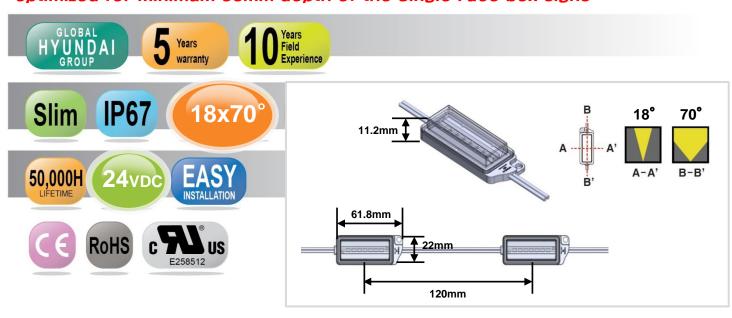

Model (Model No.)	Input Vol.	Power Con.	CCT	Beam angle	CRI	Lum. Flux	Lum. Efficacy	Module No. per a pack
H-LED 358 WHITE (BFL358-DW12)	24VDC	1.92W	6500K	18x70°	Ra80	192 lm	100 lm/W	30modules (3.6m) Module pitch 120mm